



91886/F

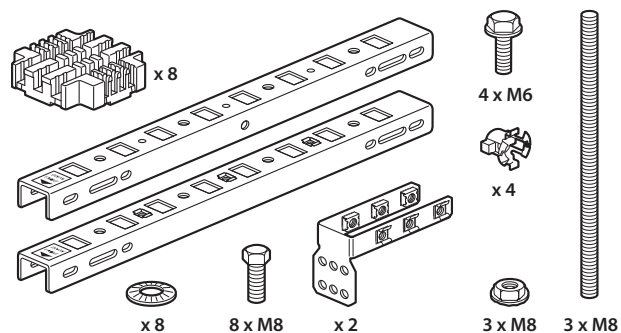



91886/S

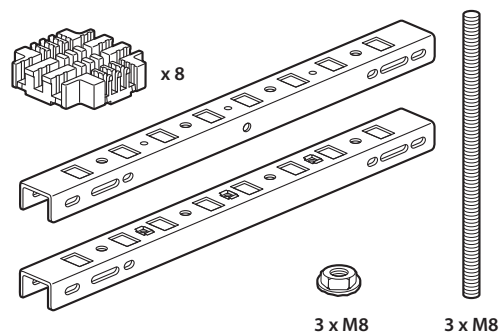



1

2


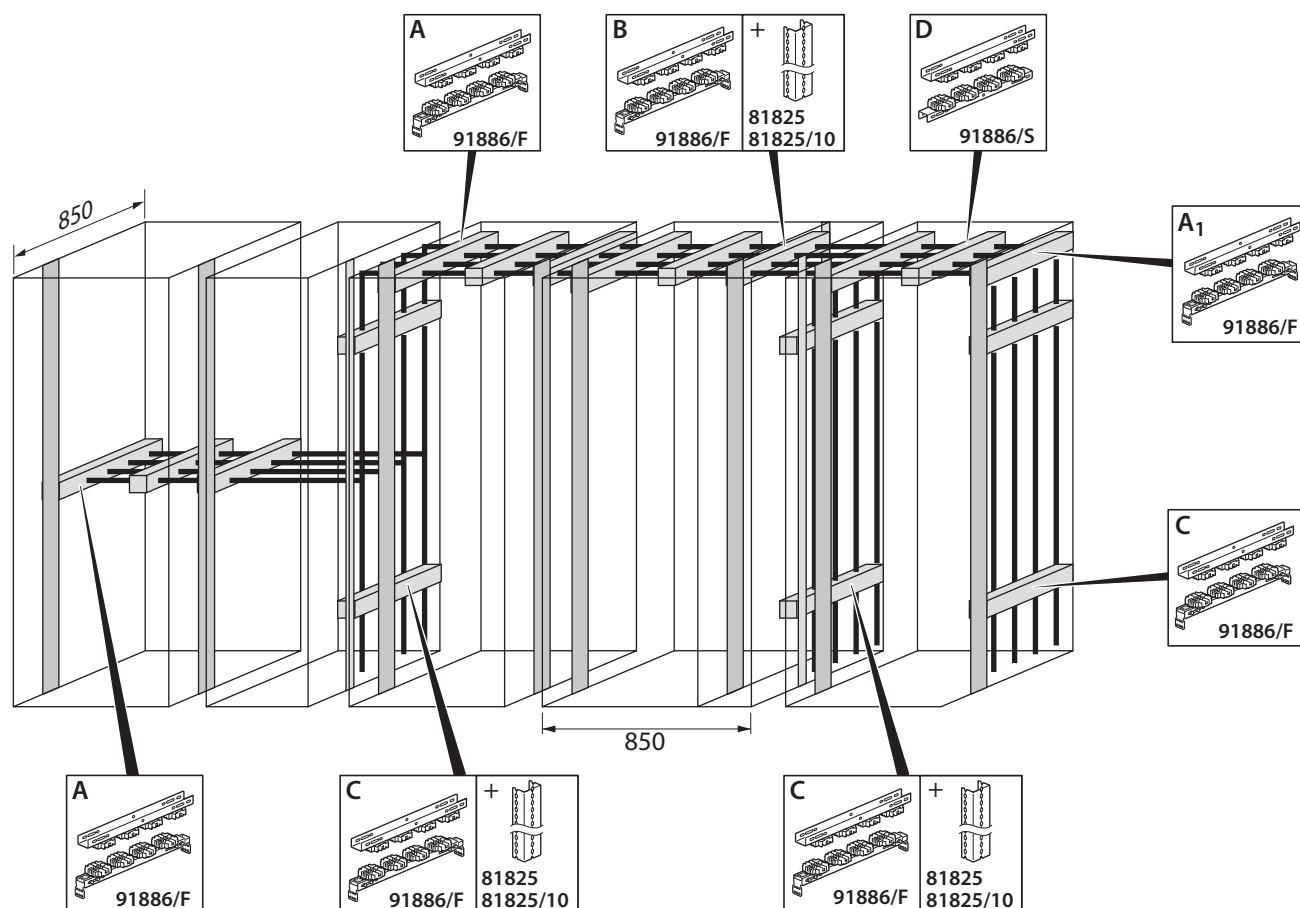


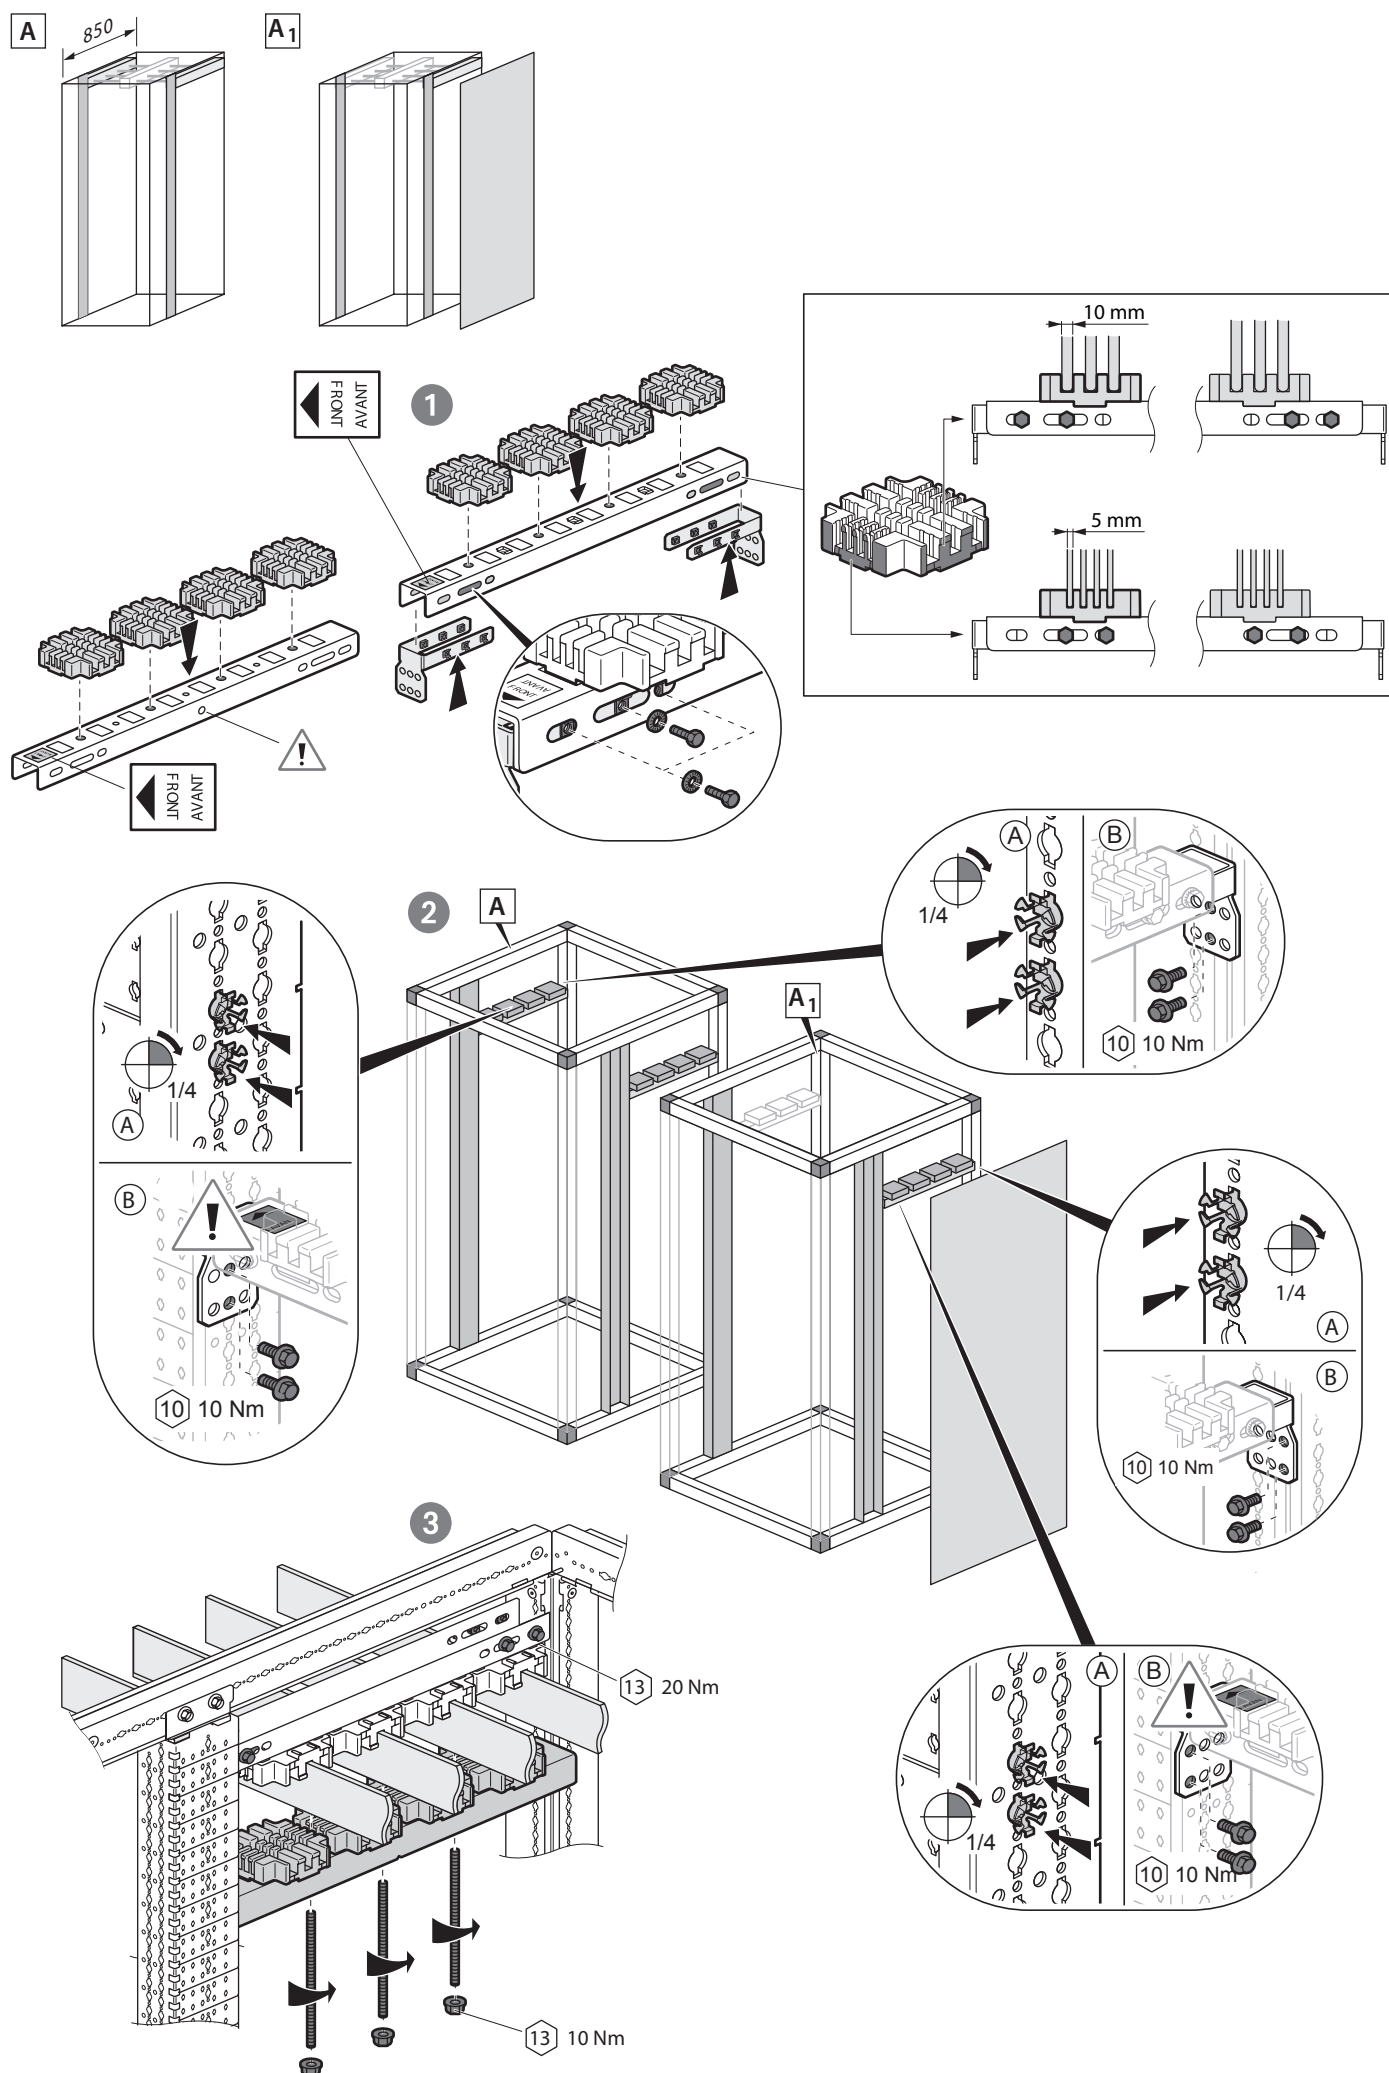

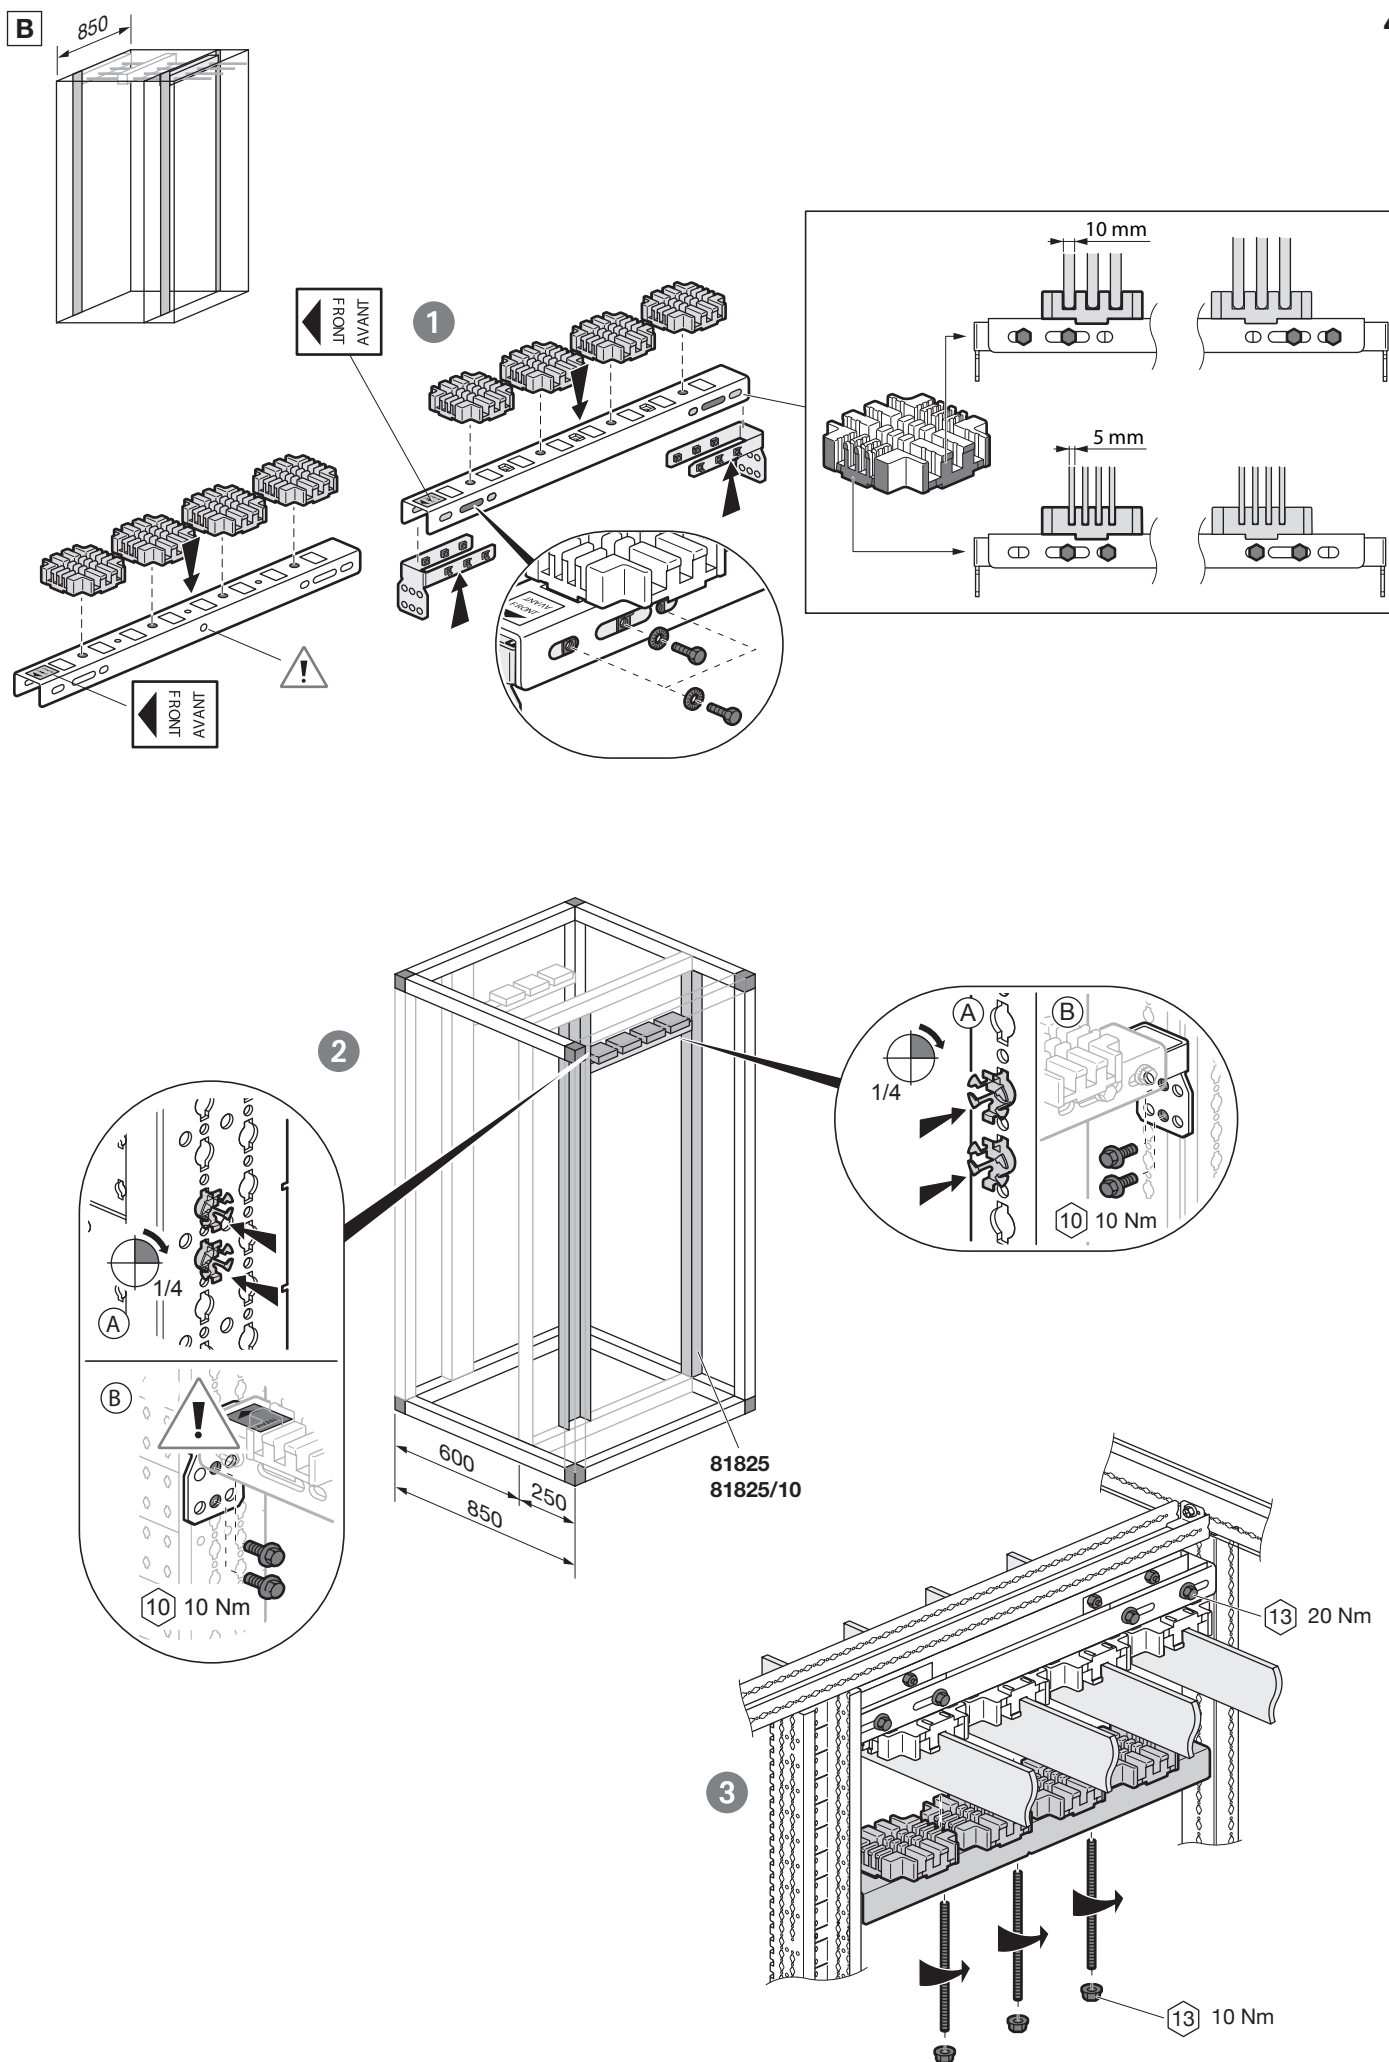


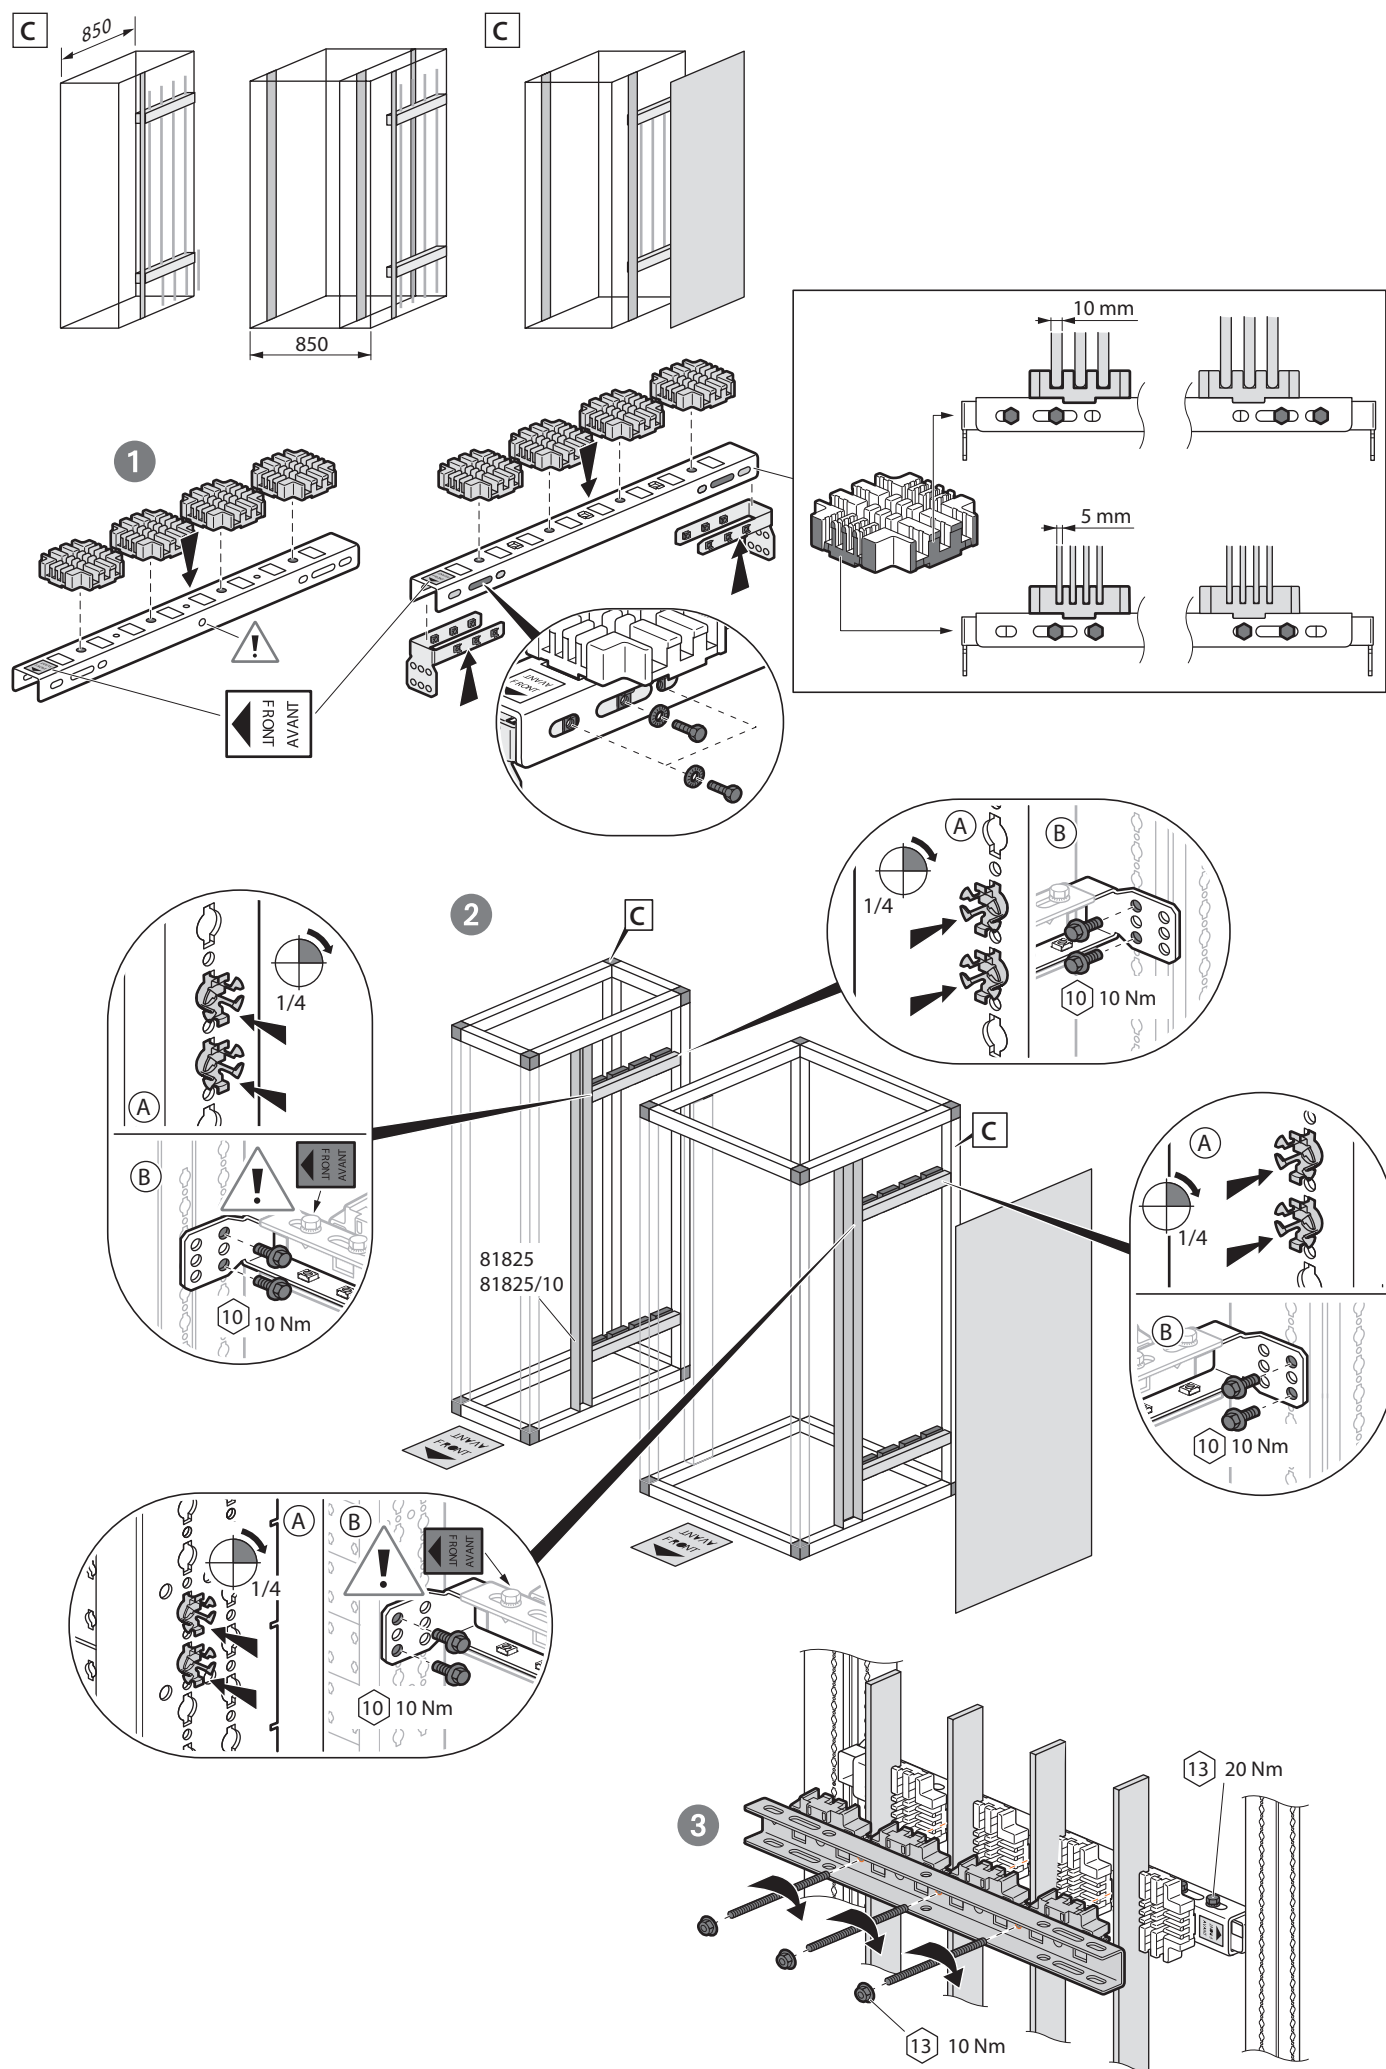


D

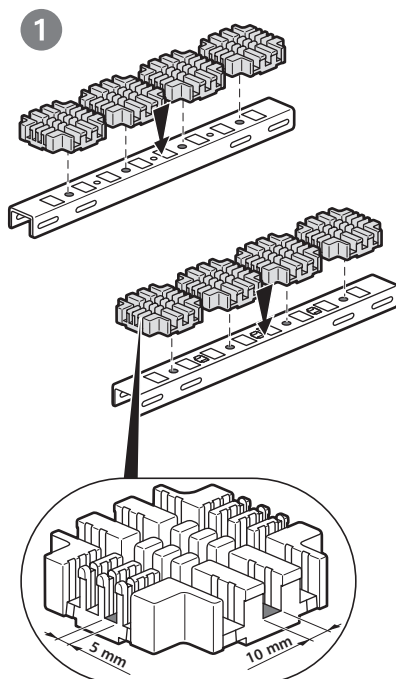

91886/S



2

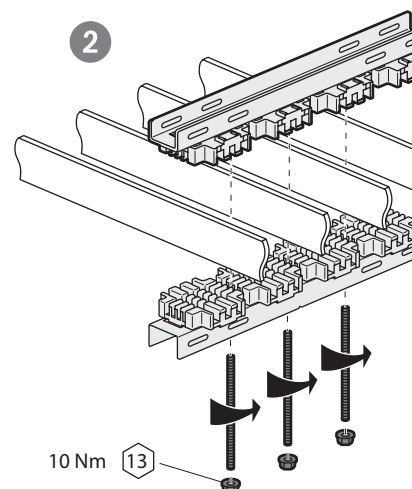

10 Nm

13

6

Distanze consigliate da mantenere (mm) con barre piatte spessore 10 mm

I_{cc} max

	80 x 10			100 x 10			120 x 10		
10	1700	1700	1700	1700	1700	1700	1700	1700	1700
12	1600	1700	1700	1700	1700	1700	1700	1700	1700
15	1350	1700	1700	1550	1700	1700	1700	1700	1700
17	1150	1700	1700	1300	1700	1700	1450	1700	1700
20	1050	1500	1700	1150	1700	1700	1300	1700	1700
25	850	1200	1600	950	1400	1700	1050	1550	1700
30	700	1000	1350	800	1150	1550	850	1300	1700
35	600	900	1150	700	1000	1300	750	1100	1500
40	550	750	1000	600	900	1150	650	1000	1300
45	450	600	850	500	700	900	550	800	950
50	400	550	750	450	650	800	500	750	800
55	350	550	700	400	600	750	450	650	750
60	350	500	650	350	550	700	400	600	700
65	300	450	600	350	500	650	400	600	650
70	250	400	550	300	450	600	350	500	500
75	250	350	500	300	450	500	300	500	500
80	250	350	500	300	400	450	300	450	450
85	250	350	450	250	400	400	300	450	400
90	200	300	450	250	350	400	300	400	400
95	200	300	400	250	350	350	250	350	350
100	-	300	350	250	350	300	250	300	300
105	-	300	300	200	300	300	250	300	300
110	-	250	300	-	300	250	200	250	250

Barre per
fase

1

2

3

1

2


3

1

2

3

Distanza tra gli isolatori

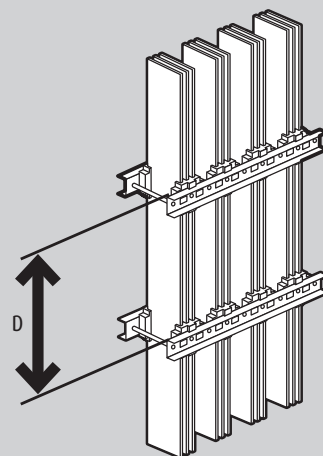

D = distanza tra gli isolatori

7

Distanze consigliate da mantenere (mm) con barre piatte spessore 5 mm


lcc max

	50 x 5				63 x 5				75 x 5 e 80 x 5			
10	800	1200	1550	1700	900	1350	1700	1700	1000	1500	1700	1700
12	650	950	1250	1550	750	1100	1450	1700	800	1200	1600	1700
15	550	800	1050	1300	600	900	1200	1500	700	1000	1350	1700
17	450	700	900	1150	550	800	1050	1250	600	900	1150	1450
20	400	600	800	1000	450	700	900	1100	550	800	1050	1300
25	350	500	650	800	350	550	750	900	450	650	850	1050
30	300	400	550	650	300	450	600	750	350	550	700	850
35	250	350	450	600	250	400	550	650	300	450	600	750
40	-	300	400	500	250	350	450	600	250	400	550	650
45	-	250	350	400	-	300	400	450	-	300	450	550
50	-	250	300	350	-	250	350	450	-	300	400	500
55	-	-	300	350	-	250	300	400	-	250	350	450
60	-	-	250	300	-	-	300	350	-	250	350	400
65	-	-	250	300	-	-	250	350	-	250	300	400
70	-	-	-	250	-	-	250	300	-	-	250	350
75	-	-	-	250	-	-	250	300	-	-	250	300
80	-	-	-	250	-	-	-	250	-	-	250	300
85	-	-	-	250	-	-	-	250	-	-	250	300
90	-	-	-	-	-	-	-	250	-	-	-	250
95	-	-	-	-	-	-	-	250	-	-	-	250
100	-	-	-	-	-	-	-	-	-	-	-	250
Barre per fase	1	2	3	4	1	2	3	4	1	2	3	4

Distanze consigliate da mantenere (mm) con barre piatte spessore 5 mm

lcc max

	100 x 5				125 x 5			
10	1150	1700	1700	1700	1350	1700	1700	1700
12	950	1400	1700	1700	1100	1550	1700	1700
15	800	1150	1550	1700	900	1300	1700	1700
17	650	1000	1300	1650	800	1150	1500	1700
20	600	900	1150	1450	700	1000	1300	1650
25	500	700	950	1150	550	800	1050	1350
30	400	600	800	1000	450	700	900	1100
35	350	500	700	850	400	650	750	950
40	300	450	600	750	350	550	700	850
45	250	350	500	600	300	500	550	700
50	250	350	450	550	250	450	500	600
55	-	300	400	550	250	450	450	550
60	-	300	350	500	250	400	450	550
65	-	250	350	450	-	400	400	500
70	-	250	300	400	-	350	350	350
75	-	-	300	350	-	350	350	300
80	-	-	300	350	-	300	300	300
85	-	-	250	300	-	-	300	250
90	-	-	250	300	-	-	300	250
95	-	-	250	250	-	-	250	200
100	-	-	250	250	-	-	250	200
Barre per fase	1	2	3	4	1	2	3	4

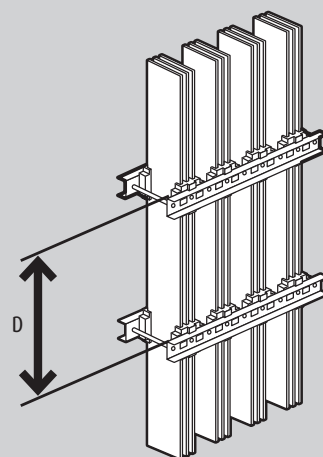Distanza tra gli isolatori


D = distanza tra gli isolatori