

Three-phase multifunction instrument with 1 “Easy Connect” input

Codes: 4 120 49
Model: EMDX³



4 121 08	4 121 09	4 121 10	4 121 11
∅ 50mm	∅ 100mm	∅ 150mm	∅ 240mm



Contents	Pages
1. Use	1
2. Range	1
3. Installation	1
4. Dimensions	1
5. Connections	2
6. Operating data	3
7. General features	3
8. Conformity and certifications	5
9. Communication	6

1. USE

The multifunction instrument, flush mounting 96x96, has a quick connector for the connection of the Rogowski type current coil trio (630A/ 1600A/ 3200A/ 6300A versions).

The measuring instrument with 4 dials, suitable for 3N-3E and 3-3E networks.

2. GAMMA



Item Code	I Inputs	Output	Digital Inputs	Voltage Range
4 120 49	1	Modbus	4 Tariffs	V-N/V-V: 3x230/ 3x400±15% V-V: 3x230 ±15%

Code	Rogowski Openable Coils				
	Input (A)	Min. Current (A)	Max. Current (A)	Cable length (m)	Diameter (mm)
4 121 08	630	12,5	750	2	50
4 121 09	1600	32,5	1950	2	100
4 121 10	3200	65,0	3900	2	150
4 121 11	6300	125,0	7500	2	240
Code				Cable length (m)	Quantity
4 149 15	-	-	-	1	x 3 max.
4 149 16	-	-	-	3	x 1 max.

3. INSTALLATION


Fixing:

On solid panel door, opening 92x92 mm

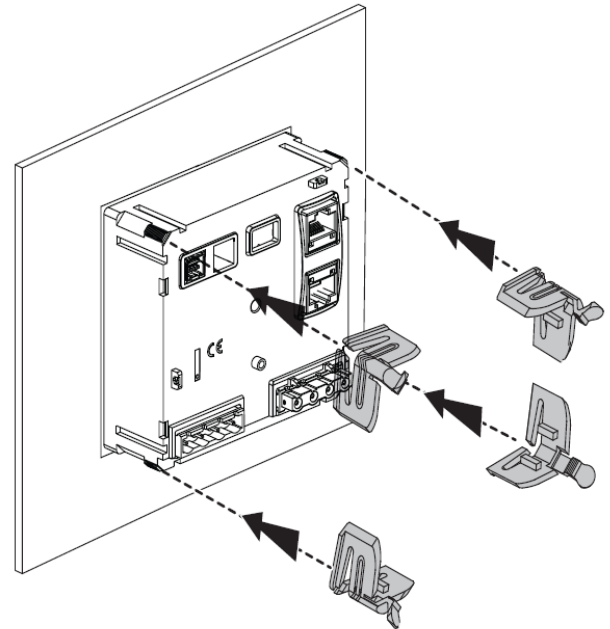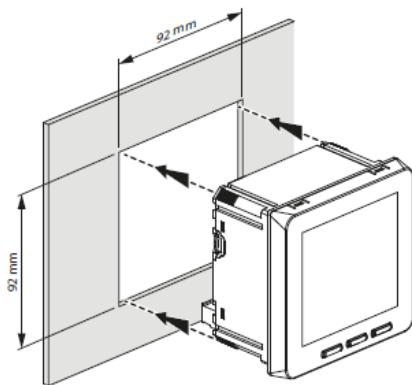

4. DIMENSIONS

Housing: flush mounting 96x96mm

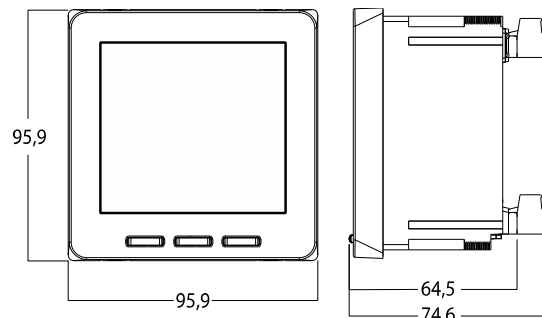

Three-phase multifunction instrument with 1 "Easy Connect" input


Codes: 4 120 49

Model: EMDX³


5. CONNECTIONS

Connection diagrams:


- 4 wires three-phase networks (3N3E; 3-3E) with 3 Rogowski coils:

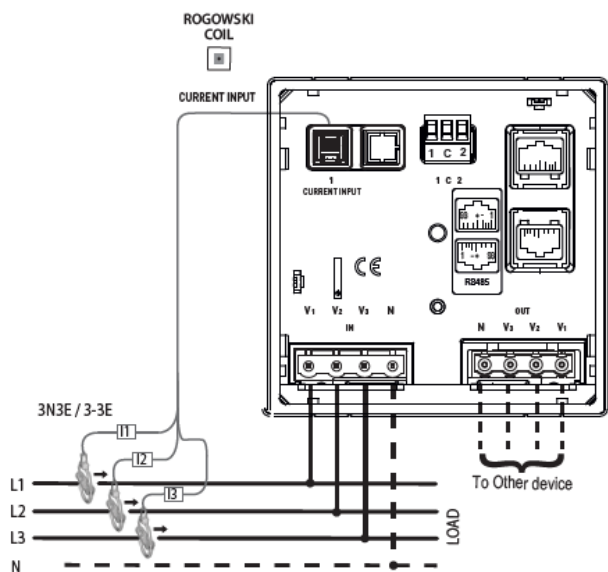

5. CONNECTIONS

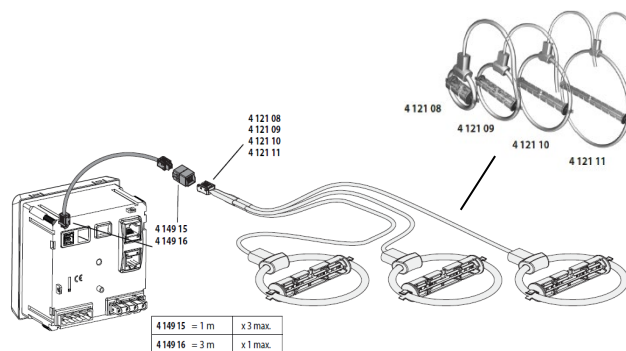


- Rogowski sensor – Cable length

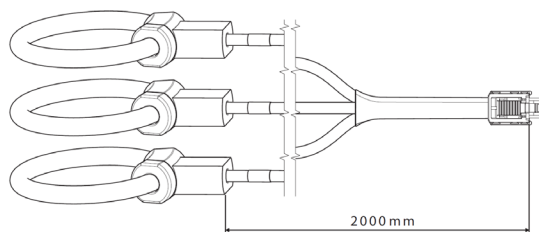

This length can be extended to 5 metres maximum with the extension cable + connector (2 m Rogowski cable and up to 3 m extension cable)

- 4 149 15, 4 149 16:

Extension cable for Rogowski coils





Item code	Length (mm)
4 149 15	1000
4 149 16	3000

Plastic centring support for

Item code	Length (mm)
4 121 08	79
4 121 09	123
4 121 10	173
4 121 11	263

Rogowski coils

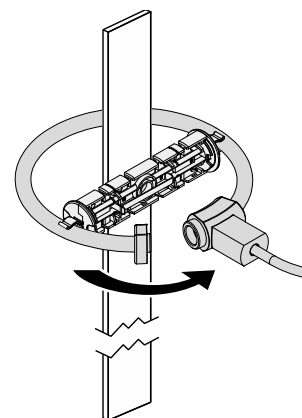

Three-phase multifunction instrument with 1 "Easy Connect" input

Codes: 4 120 49
Model: EMDX³

6. OPERATING DATA

6.1 ELECTRIC DATA

The reference capacity (I_{ref}) can be programmed based on the selected Rogowski:

Current capacity	I_{min}	I_{ref}	I_{max}
630	12,5A	250A	750A
1600	32,5A	650A	1950A
3200	65A	1300A	3900A
6300	125A	2500A	7500A

V1,V2,V3,N voltages:

- Three-phase voltage: V-N/ V-V : 3x230 /3x400 ±15%
- V-V: 3x230 ±15%

Maximum section of the cables that can be connected to the V1,V2,V3,N terminals:

Terminals	Without bush	With bush
Rigid wire	0,05 + 1,5 mm ²	0,05 + 2,5 mm ²
Flexible wire	0,05 + 1,5 mm ²	0,05 + 2,5 mm ²

Self-powered (terminals V and N):

- Rated frequency: 50/60Hz
- Operating frequency: 45...65Hz
- Self consumption: ≤ 2.5VA @230 Vac

Maximum dissipated thermal power for the thermal dimensioning of the panels: ≤ 5W

6.2 MECHANICAL DATA

Screw terminals:

- Max external dimensions: 24mm
- Stripping lengths for input cable and tariff 5mm; 7.5mm for in/out voltages

Screw head:

- Voltage connection terminals (V1, V2, V3, N) with COMBI screws: (slotted/ PH1 Phillips head).
- slotted head screws for terminals (N, V3, V2, V1) .
- Terminal boards in the upper part of the multifunction (input tariffs): screws with countersunk head with hexagon socket

Recommended torque:

- Voltage connection terminals (V1, V2, V3, N): 0.5Nm
- Voltage connection terminals (N, V3, V2, V1): 0.5Nm
- Tariff terminal boards: 0.2 Nm


Necessary tools:

- For tariff version terminals, use a 2.5mm flat screwdriver
- For voltage terminals, use a 3.5mm slotted screwdriver and/or a PH1 Phillips screwdriver

7. GENERAL FEATURES (continues)


Marking of communication outputs and tariff inputs:

- by indelible tampography

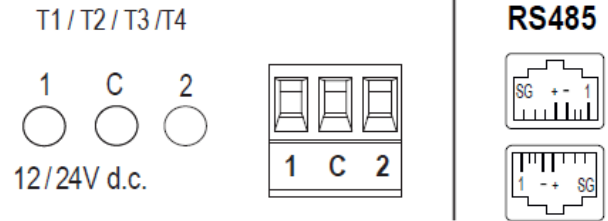

Front marking:

- Indelible digital print.

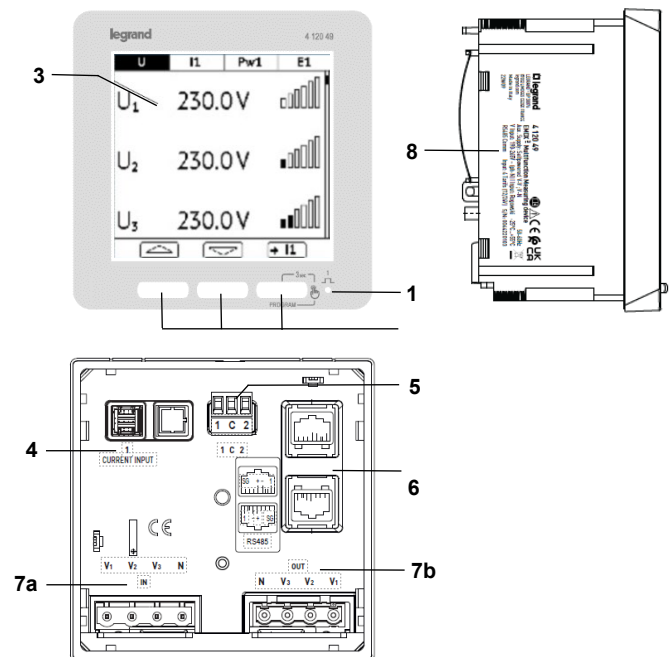

1. Metrological LED
2. Keypad with 3 multifunction pushbuttons
3. Graphic display
- 4.1 current input
5. Tariff inputs
6. RJ45 connection for Modbus RTU
- 7a. Inputs voltages
- 7b. Output voltages
8. Product label

Three-phase multifunction instrument with 1 "Easy Connect" input

Codes: **4 120 49**

Model: **EMDX³**

7. GENERAL FEATURES

Display e LED metrological :

- Graphic, backlit, 3.5 inches (256x240 dots).
- Reading points: 10,000 4 digits (digit height 5 mm)
- Energy measure: 9 digit meter (digit height 5 mm)
- Resolution: automatic
- Decimal point: automatic
- Update time: 1sec.

Rogowski inputs	Energy Resolution	Wh/imp.
630A	1kWh/kvarh/kVAh	10
1600A	1kWh/kvarh/kVAh	25
3200A	1kWh/kvarh/kVAh	50
6300A	0,01MWh/Mvarh/MVAh	100

Display of the value and programming:

- By means of the front keypad, 3 pushbuttons (see the user manual).
- Access protected by identification code (**predefined code 1000**)

Measurements and precision in conformity with EN/IEC 61557-12

- Current: cl.1
- Voltage: cl.0.5
- Frequency: $\pm 0,1$ Hz
- Instantaneous total active power, phase, average value and max. average value: cl.1
- Instantaneous total reactive power, phase, average value and max. average value: cl.2
- Instantaneous total apparent power, phase, average value and max. average value: cl.1
- Power Factor: cl.1
- Total and partial active energy, tariff, phase, positive and negative cl.1
- Total and partial reactive energy, tariff, phase, positive and negative cl.2
- Apparent energy cl.1

The above classes are guaranteed by maintaining the centring, between Rogowski sensor and primary conductor, with the appropriate accessories provided and a harmonic content within the limits of the EN/IEC 61557-12 standard

Harmonic analysis (THD): value and graphic

- Up to the 15th harmonic

Average power:

- Measurement: apparent, reactive, active power
- Calculation: moving average, on the selected period
- Average time: 3/5/8/10/15/20/30/60min
- Load Profile (power load curve), diagram of the last 24 recorded average power values

Average time set | Curve interval

3 min	72 min
5 min	2 hours
60 min	24 hours

Resettable meter:

- Counting of operating hours and minutes
- 7-figure resolution (5 for the hours + 2 for the minutes)
- Maximum display: 99999.99
- Programmable value: 0...50% Pn (Positive active power)

7. GENERAL FEATURES (continues)


Digital input

- The digital input allows switching the energy counting on 4 tariffs
- 3 input terminals with common point (1 - C - 2)

Maximum section that can be connected to the terminals:

Terminals	Without bush	Without bush
Rigid wire	0,2 + 1 mm²	0,2 + 1 mm²
Flexible wire	0,2 + 1 mm²	0,2 + 1 mm²

- Rated voltage: 12-24Vdc, 10mA Max.



Features of the ModBus communication port

- Programmable addresses: from 1 to 247 (5*)
- Communication speed: 4.8 – 9.6 – 19.2* – 38.4 kbps
- Parity bit: none, even*, odd
- Stop bit: 1
- Galvanically isolated with respect to the measurement inputs
- Standard RS485 3 wires, Half-Duplex on RJ45 connector –
- Modbus® RTU protocol
- Response time: ≤ 200 ms
- 120 Ω terminating resistor inside the instrument (it can be set in the SETUP menu, default value: none*)
- **4 120 49**: Programmable address from 1 to 247

* Factory data

Three-phase multifunction instrument with 1 "Easy Connect" input

Codes: 4 120 49

Model: EMDX³

7. GENERAL FEATURES

Recommendations:

For the device protection against overloads and short circuits, it is recommended to use a thermal-magnetic circuit breaker

Protection class:

- Protection index of terminals against direct contacts:
IP 20 (IEC/EN 60529);
- Protection index of the front face against direct contacts:
IP 54 (IEC/EN 60529);
- Class II: front panel with cover plate;
- Protection class against mechanical impacts IK03 (IEC/EN 62262)

Resistance to vibrations:

- Vibration: from 5 to 150Hz width 0,15mm/1g
- Shock: 19g / 16msec

Housing material:

Self-extinguishing Polycarbonate, reinforced 10% Glass fibre;
Identification according to ISO 11469: >PC-GF10-FR<;
GWFI IEC 60965-2-12 (§1.6mm): 960°C;
Flame rating UL 94 / IEC 60695_11_10 (1.6/3.2 mm): V0;

Operating temperatures:

- Tmin. = - 20 °C; Tmax. = + 60 °C.

Room storage temperatures:

- Tmin. = - 25 °C; Tmax. = + 70 °C

Weight: 0,250Kg

Packaged volume: 1.27 dm³.

Room: mechanical M1 – electric E2

Three-phase multifunction instrument with 1 "Easy Connect" input

Codes: 4 120 49

Model: EMDX³

8. CONFORMITY AND CERTIFICATIONS

Insulation

- Measurement categories: III (according to EN-61010)
- Level of pollution: 2
- Insulation voltage, U_i : 300V, Phase-Neutral

Dielectric rigidity:

- Power supplies/ Outputs: 3kV / 50Hz / 1min
- Housing / Terminals: 4kV / 50Hz / 1min

Pulse:

- Power supplies: 6.3kV / 1.2 – 50µsec / 0.5J

In compliance with the standards:

- Precision class: Active energy class 1 (EN/IEC 62053-21)
- Precision class: Class 2 reactive energy (EN/IEC 62053-23)
- Electromagnetic compatibility: Tests in accordance with EN/IEC 62052-11 / EN 61326-1
- Precision class according to IEC/EN61557-12
- 2014/35/UE 2014/30/UE

Respecting the environment – Conformity with the CEE directives:

- Compliance with the 2100/65/EU Directive, as modified by the 2015/863 Directive (RoHS 2), on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
- Conformity with the REACH Regulation (1907/ 2006): at the date of publication of this document no substance in the annex XIV is found in these products.
- RAEE Directive (2012/19/EU: the sale of this product includes a contribution to the appointed environmental bodies of each European country in charge of handling, at the end of their life, the products falling within the scope of the EU Directive on Electric and Electronic Equipment Waste.

Plastic materials:

- Plastic materials without Halogens.
- Part marking according to standards ISO 11469 and ISO 1043.

Packaging:


- Packaging designed and produced in accordance with Decree 98-638 of 20/07/1998 and directive 94/62/CE.

Three-phase multifunction instrument with 1 “Easy Connect” inputs


Codes: 4 120 49
Model: EMDX³

9. COMMUNICATION

RS485 Modbus wiring diagram:

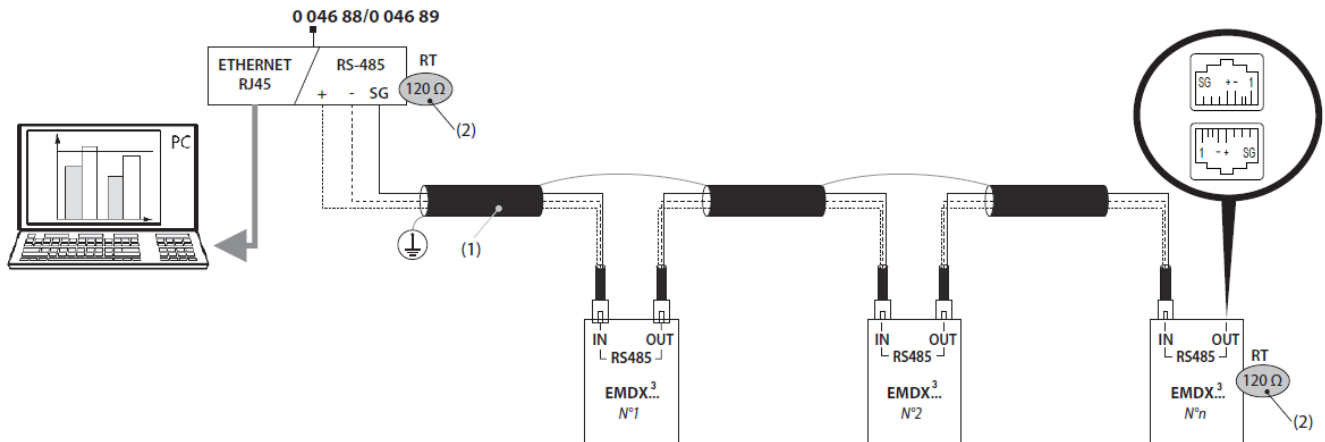

RS485 Modbus wiring diagram with Mini Web Server:

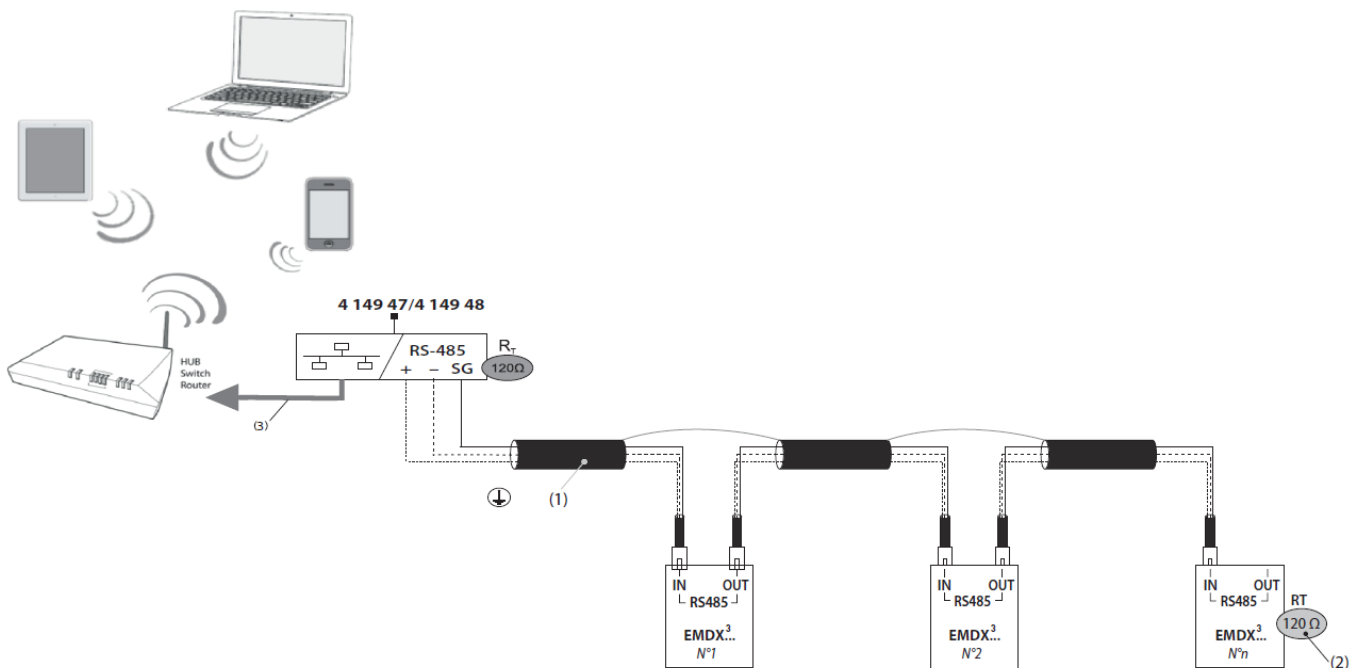

- (1) RS485: Required use of Belden 9842 or Belden 3106A wire (or equivalent) for a maximum bus length of 1000 m, or Category 6 wire (FTP or UTP) for a maximum length of 50 m
- (2) 120Ω terminating resistor inside the instrument (it can be set in the SETUP menu)
- (3) Ethernet: Cat. 6 (FTP/UTP)
- (4) The “SG” terminal must never be connected to the earth

Communication tables

- The MODBUS communication protocol is available on the <https://www.legrand.com/ecatalogue/> site.