


Before you start

If you plan to install switches for rolling shutters, read the following precautions:

To control a rolling shutter switch with one or more wireless controls, only use the products :

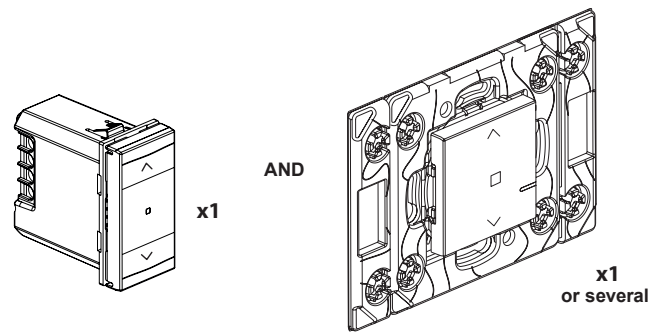

Smart curtain/roller blind switch with neutral

Smart curtain/roller blind wireless control (not included in this pack)


Ensure you have wireless controls for rolling shutters for each additional control point.

To create a centralized control:

- Use one or more Smart curtain/roller blind switch with neutral.
- Use a wireless control for rolling shutters.

This product is a connected accessory which requires you to buy and install the Arteor™ Advance with Netatmo Smart Gateway.

Pack contents

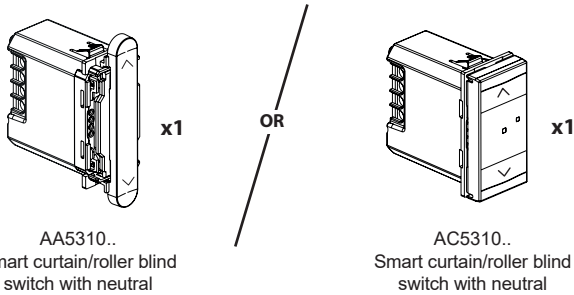

Frequency bands: 2.4 - 2.4835 GHz - Power level: < 100 mW

Characteristics


+35°C +5°C	1 x 2,5 mm² 2 x 1,5 mm²	Rolling shutter motor
100 - 240 VAC 50/60 Hz		
240 VAC max.		1 x 500 VA
100 VAC max.		1 x 270 VA

⚠ Safety instructions:

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.


LE15070AA

① Necessary safety precautions

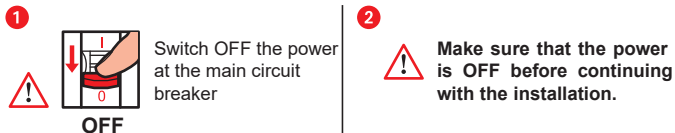

② Install the smart curtain/roller blind switch with neutral

① Wire the smart curtain/roller blind switch with neutral

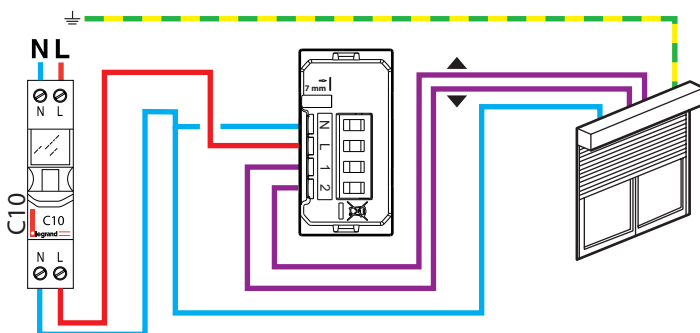

The Arteor™ Advance with Netatmo solution is compatible with rolling shutters with a mechanical or electronic stop, controlled by a standard wired switch for rolling shutters. They are not compatible with motors directly controlled by radio control. To check it, refer to the rolling shutter instructions.

- N (neutral) = blue
- L (live) = any except blue and green/yellow
- ⚬ (earth) = green/yellow

③ To add a connected product to your connected installation, you should follow the instructions:

- in the **Legrand Home + Control** application settings/Add a new product section)
- or consult the user manuel on legrand.com



www.legrand.com/reference/AC5310MW

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,

Legrand


declares that the radio-electric equipment referred to in these instructions complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website:

www.legrand.com/ecatalogue

إذا كنت تنوي تركيب مفاتيح للستائر الدوارة، فافقراً الإحتياجات التالية

للتحكم في مفتاح الستارة الدوارة باستخدام وحدة تحكم لاسلكية واحدة أو أكثر، استخدم فقط المنتجات التالية

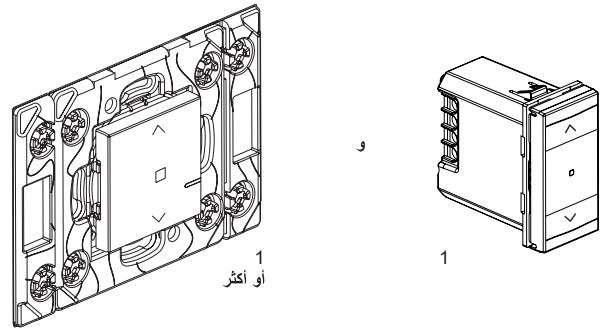

المفتاح الذي للستائر/الستائر
الدوارة مع سلك محايد/نيوترال


مفاتيح التحكم الذكية التي تثبت في
الحائط لجميع التحكمات الأخرى
(غير متضمنة في هذه الحزمة)

تأكد من وجود وحدات تحكم لاسلكية للستائر الدوارة لكل نقطة تحكم إضافية

لإنشاء تحكم مركزي

- استخدم مفتاح الستائر/الستائر الدوارة الذي مع سلك محايد
- استخدم وحدة تحكم لاسلكية للستائر الدوارة

هذا المنتج هو ملحق متصل يتطلب منك شراء وتركيب الموجه
الذي Netatmo Arteor™ مع.

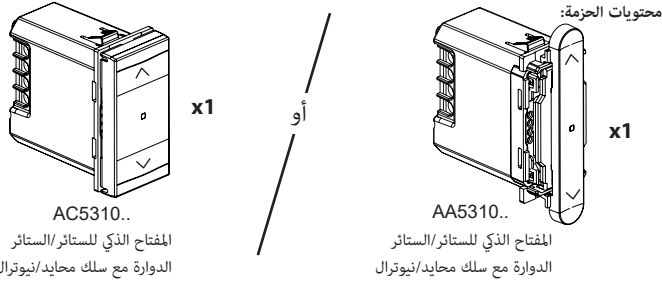

نطاقات التردد: 2.4 - 2.4835 GHz - مستوى الطاقة > 100 mW

مواصفات المنتج

موتور الستارة اللفافة	240-100 فولت تيار متردد 50/60 هرتز	35+°م 5+°م
1 500 فولت أمبير	1 2.5x2 ملم 2 1.5x2 ملم	240 فولت تيار متردد بحد أقصى
1 270 فولت أمبير	100 فولت تيار متردد بحد أقصى	

إرشادات الأمان:

يجب تركيب هذا المنتج طبقاً لقواعد التركيب ويفضل أن يقوم بالتركيب كهربائي مؤهل. فقد يؤدي التركيب الخاطئ و/أو الاستخدام الخاطئ إلى مخاطر التعرض لصدمة كهربائية أو نشوب حريق. اقرأ النشرة قبل التركيب، وأفرد مكاناً لتركيب المنتج خاصاً به. لا تفتح أو تفك أو تعطل أو تحوّل المنتج ما لم يُنصَح إلى ذلك بشكل محدد في النشرة. فكل منتجات Legrand يجب فتحها وإصلاحها حصراً من قبل فنيين مدربين ومؤهلين لدى Legrand. وكل فتح أو إصلاح غير مسموح به يُبطل المسؤولية وحقوق الاستبدال والضمانات. لا تُستخدم سوى إكسسوارات من ماركة Legrand حصراً.


5

① احتياطات السلامة الضرورية



② قم بتثبيت مفتاح الستائر/الستائر الدوارة الذي مع سلك محايد

① قم بتوصيل مفتاح الستائر/الستائر الدوارة الذي مع سلك محايد

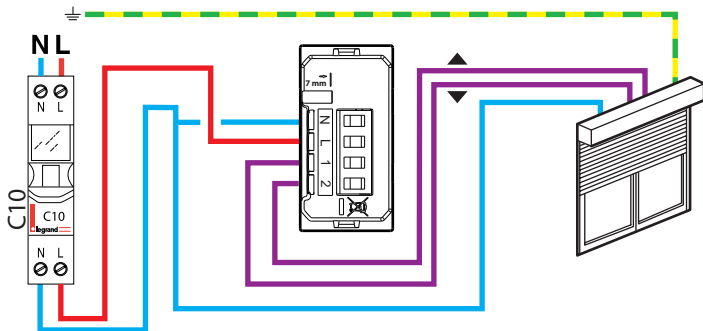

أرتيور أدفانس' مع نيتاتمو متوافق مع الستائر الدوارة التي تحتوي على توقف ميكانيكي أو إلكتروني، والتي يتم التحكم فيها بواسطة مفتاح سلكي قياسي للستائر الدوارة لا تتوافق مع المحركات التي يتم التحكم فيها مباشرة بواسطة التحكم عن بعد. للتحقق، يُرجى الرجوع إلى تعليمات الستائر الدوارة

م (محايد) = أزرق
ك (خط كهربائي) = أي واحد فيما عدا الأزرق والأخضر/الأصفر
⊥ (أرضي) = أخضر/أصفر

7

إضافة منتج متصل إلى تثبيتك المتصل، يجب عليك اتباع التعليمات:

- في تطبيق Legrand Home + Control (الإعدادات/إضافة منتج جديد).
- أو استشر دليل المستخدم على www.legrand.com.


www.legrand.com/reference/AC5310MW

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

إعلان مطابقة مبسط للاتحاد الأوروبي:

الموقع أدناه،
يعلم أن المعدات الكهربائية اللاسلكية المشار إليها في هذه
التعليمات تتوافق مع التوجيه 2014/53.EU.
النص الكامل لإعلان المطابقة للاتحاد الأوروبي متاح على الموقع الإلكتروني التالي:

www.legrand.com/ecatalogue

8