Description

DIN module actuator for the control of 0-10 V valves in temperature control systems It has two 0-10 V outputs, two control pushbuttons for manual opening/closing of each valve and the corresponding status LEDs.

Technical data

Power supply from SCS BUS: $18-27 \, \text{Vdc}$ Stand by absorption: $19 \, \text{mA}$ Max. absorption: $25 \, \text{mA}$ Operating temperature: $(+5)-(+40) \, ^{\circ}\text{C}$ Outputs: $2 \, \text{x} \, 0-10 \, \text{V}$ Maximum current on each output: $1 \, \text{mA}$

Configuration

Physical configuration.



ZA1, ZB1 = Zone address 1


N1 = Progressive zone number for output 1

ZA2, ZB2 = Zone address 2

N2 = Progressive zone number for output 2

Virtual configuration using the MyHOME_Suite software:

The device can be configured remotely only if not already physically configured. The configuration is completed using version 1.3 or higher of the MyHOME_Suite software, which can be downloaded from the website www.homesystems-legrandgroup.com.

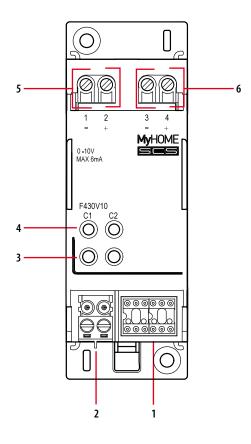

Legend

- 1. Configurator socket
- 2. BUS
- 3. LED
- 4. Pushbuttons
- 5. Valve 1 output
- 6. Valve 2 output

