

# Product Environmental Profile

Patch cord/user cord RJ 45 - Cat.6 - F/UTP  
screened - PVC - 1 m



## LEGRAND'S ENVIRONMENTAL COMMITMENTS

• **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).

• **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

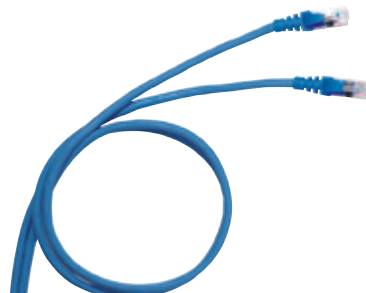
• **Involve the environment in product design and provide informations in compliance with ISO 14025**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



## REFERENCE PRODUCT

|                                 |  |
|---------------------------------|--|
| <p><b>Function</b></p>          | <p>Transmit a communication signal on 1 m according to Ethernet 1 G protocol, 6 category, during 10 years and a 25 % use rate in accordance with the IEC 61156-5. Equipped with 2 RJ 45 connectors.<br/>Life time and use rate correspond to the Application Building - LAN: tertiary as defined in the table given in Annex 1 of the Specific rules for Wires, cables and connection equipment.</p> |
| <p><b>Reference Product</b></p> |   |
|                                 | <p>Cat.No 0 517 62<br/>Patch cord/user cord RJ 45 - Cat.6 - F/UTP screened - PVC - 1 m.</p>  |

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



## PRODUCTS CONCERNED

The environmental data is representative of the following products:

| Catalogue Numbers  |
|--|
| <ul style="list-style-type: none"> <li>• 0 517 62</li> <li>• 0 517 63</li> <li>• 0 517 64</li> <li>• 0 517 65</li> </ul> |

# Product Environmental Profile

Patch cord/user cord RJ 45 - Cat.6 - F/UTP  
screened - PVC - 1 m



## ■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EU.

|  |                                    |
|--|------------------------------------|
| <b>Total weight of Reference Product</b> | <b>116 g</b> (with unit packaging) |
|--|------------------------------------|

| Plastics as % of weight |               | Metals as % of weight |               | Other as % of weight             |               |
|-------------------------|---------------|-----------------------|---------------|----------------------------------|---------------|
| PVC                     | 17.3 %        | Copper alloys         | 12.3 %        |                                  |               |
| PE                      | 6.5 %         | Al                    | 1.4 %         |                                  |               |
| PC                      | 2.2 %         | Other metal           | 0.4 %         |                                  |               |
| PET                     | 1.2 %         | Steel                 | 0.3 %         |                                  |               |
|                         |               |                       |               | Packaging as % of weight         |               |
|                         |               |                       |               | Wood (packaging)                 | 36.0 %        |
|                         |               |                       |               | Paper (packaging)                | 17.6 %        |
|                         |               |                       |               | PE (packaging)                   | 4.8 %         |
| <b>Total plastics</b>   | <b>27.3 %</b> | <b>Total metals</b>   | <b>14.4 %</b> | <b>Total other and packaging</b> | <b>58.3 %</b> |

Estimated recycled material content: 20 % by mass.



## ■ MANUFACTURE

This Reference Product comes from sites that have received ISO14001 certification.



## ■ DISTRIBUTION

Products are distributed from logistics centres located with a view to optimize transport efficiency. The Reference Product is therefore transported over an average distance of 1270 Kms by road and 3942 Kms by sea from our warehouse to the local point of distribution into the market in all around the world.

Packaging is compliant with applicable regulation. At their end of life, its recyclability rate is 89 % (in % of packaging weight).



## ■ INSTALLATION

For the installation of the product, only standard tools are needed.



## ■ USE

Under normal conditions of use, this product requires no servicing, no maintenance or additional products.

# Product Environmental Profile

Patch cord/user cord RJ 45 - Cat.6 - F/UTP  
screened - PVC - 1 m



## END OF LIFE

The product end-of-life factors are taken into account during the design phase. Dismantling and sorting of components or materials is made as easy as possible with a view to recycling or failing that, another form of reuse.

• **Recyclability rate:**

Calculated using the method described in technical report IEC/TR 62635, the recyclability rate of the product is estimated at 92 %. This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for the end of life of this product.

Separated into:

- plastic materials (excluding packaging) : 26 %
- metal materials (excluding packaging) : 14 %
- other materials (excluding packaging) : 0 %
- packaging (all types of materials) : 52 %



## ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from worldwide marketed products.

For each phase, the following modelling elements were taken in account:

|                                   |   |
|-----------------------------------|---|
| <b>Manufacture</b>                | Materials and components of the product, all transport for the manufacturing, the packaging and the waste generated by the manufacturing.   |
| <b>Distribution</b>               | Transport between the last Group distribution centre and an average delivery point in the sales area.   |
| <b>Installation</b>               | The end of life of the packaging.   |
| <b>Use</b>                        | <ul style="list-style-type: none"> <li>• Product category: PSR-0001-ed3-EN-2015 10 16 / category «Twisted pair cables».</li> <li>• Use scenario: the duration and rate of utilization correspond to the Application Building - LAN: tertiary as defined in the table given in Annex 1 of the Sector Guide Wires, cables and connection equipment: non-continuous operation for 10 years of working life, during 25 % of the time (for LAN tertiary applications), 1.13 mW of energy losses (determined by standard for 1G Ethernet Cat6). This modelling duration does not constitute a minimum durability requirement.</li> <li>• Energy model: Electricity Mix ; China - 2009.</li> </ul> |
| <b>End of life</b>                | The default end of life scenario maximizing the impacts.  |
| <b>Software and database used</b> | EIME V5 and its database «CODDE-2015-04»  |

# Product Environmental Profile

Patch cord/user cord RJ 45 - Cat.6 - F/UTP  
screened - PVC - 1 m



## SELECTION OF ENVIRONMENTAL IMPACTS

|   | Total for Life cycle |  | Raw material and manufacture |       | Distribution |       | Installation |     | Use      |       | End of life |       |
|---|----------------------|--|------------------------------|-------|--------------|-------|--------------|-----|----------|-------|-------------|-------|
|   | Value                | Unit                                   | Value                        | %     | Value        | %     | Value        | %   | Value    | %     | Value       | %     |
| Global warming                                | 3.26E-01             | kgCO <sub>2</sub> eq.                  | 2.41E-01                     | 74 %  | 8.11E-03     | 2 %   | 0.00E+00     | 0 % | 2.52E-02 | 8 %   | 5.13E-02    | 16 %  |
| Ozone depletion                               | 4.72E-08             | kgCFC-11 eq.                           | 4.51E-08                     | 96 %  | 1.64E-11     | < 1 % | 0.00E+00     | 0 % | 2.00E-10 | < 1 % | 1.87E-09    | 4 %   |
| Acidification of soils and water              | 5.91E-04             | kgSO <sub>2</sub> eq.                  | 4.72E-04                     | 80 %  | 3.68E-05     | 6 %   | 0.00E+00     | 0 % | 2.73E-05 | 5 %   | 5.48E-05    | 9 %   |
| Water eutrophication                          | 1.54E-04             | kg[PO <sub>4</sub> ] <sup>3-</sup> eq. | 1.07E-04                     | 70 %  | 8.40E-06     | 5 %   | 0.00E+00     | 0 % | 7.27E-06 | 5 %   | 3.12E-05    | 20 %  |
| Photochemical ozone formation                 | 5.56E-05             | kgC <sub>2</sub> H <sub>4</sub> eq.    | 4.47E-05                     | 80 %  | 2.61E-06     | 5 %   | 0.00E+00     | 0 % | 3.22E-06 | 6 %   | 5.06E-06    | 9 %   |
| Depletion of abiotic resources - elements     | 5.30E-04             | kgSb eq.                               | 5.30E-04                     | 100 % | 3.25E-10     | < 1 % | 0.00E+00     | 0 % | 1.11E-10 | < 1 % | 1.27E-09    | < 1 % |
| Total use of primary energy                   | 8.69E+00             | MJ                                     | 7.80E+00                     | 90 %  | 1.15E-01     | 1 %   | 0.00E+00     | 0 % | 4.25E-01 | 5 %   | 3.51E-01    | 4 %   |
| Net use of fresh water                        | 4.96E-03             | m <sup>3</sup>                         | 4.88E-03                     | 99 %  | 7.26E-07     | < 1 % | 0.00E+00     | 0 % | 2.81E-05 | < 1 % | 4.49E-05    | < 1 % |
| Depletion of abiotic resources - fossil fuels | 5.01E+00             | MJ                                     | 4.25E+00                     | 85 %  | 1.14E-01     | 2 %   | 0.00E+00     | 0 % | 3.94E-01 | 8 %   | 2.53E-01    | 5 %   |
| Water pollution                               | 8.83E+01             | m <sup>3</sup>                         | 3.25E+01                     | 37 %  | 1.33E+00     | 2 %   | 0.00E+00     | 0 % | 1.25E+00 | 1 %   | 5.32E+01    | 60 %  |
| Air pollution                                 | 1.20E+02             | m <sup>3</sup>                         | 1.15E+02                     | 96 %  | 3.34E-01     | < 1 % | 0.00E+00     | 0 % | 2.61E+00 | 2 %   | 1.65E+00    | 1 %   |

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website.

For products covered by the PEP other than the Reference product, the environmental impacts of each phase of the lifecycle are calculated with (see under):

|  | Cord Cat. 6 U_UTP PVC |                               |              |              |      |             |
|--|-----------------------|-------------------------------|--------------|--------------|------|-------------|
|  | Total for life cycle  | Raw materials and manufacture | Distribution | Installation | Use  | End of life |
| Cord Cat.6 F_UTP PVC Cat.No 0 517 62 (1 meter)   |                       |                               |              |              |      |             |
| Cord Cat.6 F_UTP PVC Cat.No 0 517 63 (2 meters)  | 1.74                  | 1.73                          | 1.82         | -            | 2.00 | 1.82        |
| Cord Cat.6 F_UTP PVC Cat.No 0 517 64 (3 meters)  | 2.48                  | 2.45                          | 2.64         | -            | 3.00 | 2.63        |
| Cord Cat.6 F_UTP PVC Cat.No 0 517 65 (5 meters)  | 3.95                  | 3.88                          | 4.25         | -            | 5.00 | 4.27        |
| Coef 2 for the Cat.No 0 517 63. Coef 3 for the Cat.No 0 517 64. Coef 5 for the Cat.No 0 517 65 |                       |                               |              |              |      |             |

|   |   |
|---|---|
| Registration N°: LGRP-00224-V01.01-EN   | Drafting rules: «PEP-PCR-ed3-EN-2015 04 02»<br>Supplemented by «PSR-0001-ed3-EN-2015 10 16»               |
| Verifier accreditation N°: VH02   | Information and reference documents: <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a> |
| Date of issue: 10-2016  | Validity period: 5 years  |
| Independent verification of the declaration and data, in compliance with ISO 14025:2010<br>Internal <input checked="" type="checkbox"/> External <input type="checkbox"/> |   |
| The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)   |   |
| The elements of the present PEP cannot be compared with elements from another program   |   |
| Document in compliance with ISO 14025: 2010: «Environmental labels and declarations. Type III environmental declarations»   |   |
| Environmental data in alignment with EN 15804: 2012 + A1: 2013  |   |

