

EBDSPiR-PRM-2CH-NC | PRM switching, compact, IP40, ceiling, flush mounted, PIR, presence/absence detector, normally closed fail-safe contacts, 2-channel



Key Product Features:


- Two channel
- Normally closed fail-safe contacts
- Low profile design
- Self contained unit
- Pluggable
- Range up to 7m at 2.8m mounting height
- Programmable via our UHS5 or UNLCDHS infrared handsets
- User handset available to control on/off, lux levels and preset scenes
- Flush or surface mounted with DBB accessory
- 5 year warranty

Key Functions:


- Switching with lux level sensing
- Programmable via our programming handset
- Absence detection functionality

Detection pattern


high < sensitivity > low

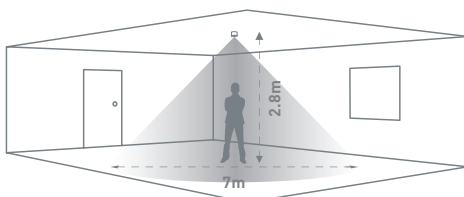



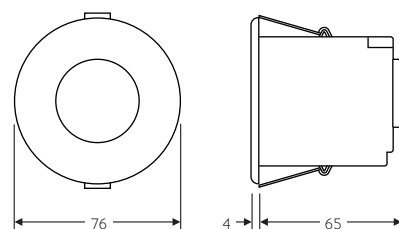





Dimensions (mm)







Technical Data

Part Code	EBDSPIR-PRM-2CH-NC	
Control method	PRM Switching	
Weight	0.150kg	
Supply voltage AC	230 VAC +/- 10%	
Supply frequency	50Hz	
Power consumption parasitic	241mW	
Terminal capacity	2.5mm ²	
Maximum loads		
Incandescent lighting	6A	
Fluorescent lighting	6A	
Compact fluorescent lighting	6A	
LED lighting	6A	
Resistive heaters	6A	
Fans and ventilation equipment	6A	
Working temperature range	-10 to 35°C	
Humidity	5 to 95% non-condensing	
Material (casing)	Flame retardant ABS and PC/ABS	
Insulation class	2	
IP rating	40	
Compliance		EMC-2014/30/EU LVD-2014/35/EU

Accessories and Associated Products

Part Number	Description
 UHS5	Compact, programming/ commissioning handset
 UHS7	Compact, user handset
 UNLCDHS	Professional, programming/ commissioning LCD handset
 EBD-ENCIP1	Pre-drilled 64mm hole detector adapter enclosure
 EXD-HSC	Extended wiring housing
 EBDSPIR-MS	Masking shields for EBDSPIR range
 DBB	Surface mount back box for 76mm diameter detectors and light level controls
 DBB-EXT	Surface mount back box extender for 76mm diameter detectors and light level controls

	<p>CP Electronics A Business unit of Legrand Electric Limited, Brent Crescent, London NW10 7XR, UK t. +44 (0)333 900 0671 info@cpelectronics.co.uk</p>	<p>Important notice: This device should be installed by a qualified electrician in accordance with the latest edition of the IEE Wiring Regulations and the applicable Building Regulations. Due to our policy of continual product improvement CP Electronics reserves the right to alter the specification of this product without prior notice.</p> <div style="text-align: right;">   </div>
<p>www.cpelectronics.co.uk</p>	<p>connect with us </p>	